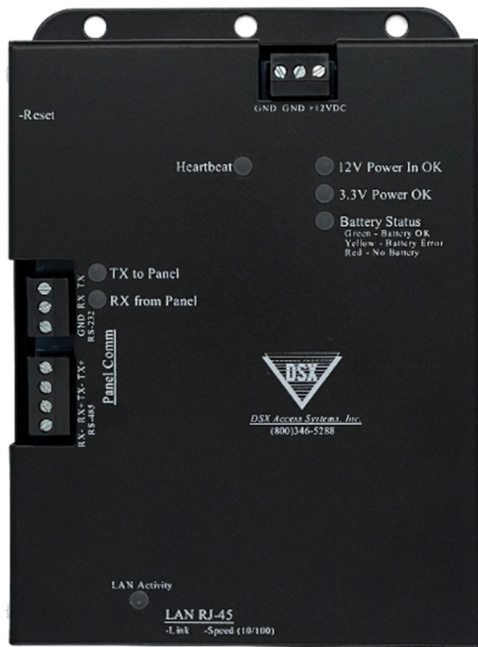# DSX-Core Browser Enabled Appliance

Access Control Software Ready to Use

No PC / No Software to Load.

Powered and connected to the Master Controller, connect to your network and you are ready to program with a browser. Locations can be defined, secured and usable within minutes for temporary or permanent applications.

Perfect solution for Locations or buildings of larger systems to be separated and sold. The DSX-LAN module at the location is removed and replaced with the DSX-Core.

- TLS Security
- Embedded Software
- System Interface for 1 - 32 Doors
- Real Time Workstation Screen
- Email Notifications
- Alarm Reporting
- Time Zone control of Readers and Keypads
- Compatible with all DSX Controllers
- Card + and Card or PIN
- 26, 33, 35, 37, 48 Bit Formats
- FIPS/CAC 75bit Card Format
- Built In Reports including Who-Is-In
- Extensive Feature Set including Anti-Passback, Number of Uses & Linking
- RS-232 / RS485 / IP ready to connect to any DSX Master Controller
- 12VDC Powered

Processor	ST32M Arm Cortex-M7
RAM/ROM Memory	Flash ROM 2M Standard RAM 1M / Extended RAM 128M / SD Card 8G
Communication Ports	1- RS-232 – Master to Core 1- RS-485 – Master to Core
Power Requirements	13.5 VDC @ 400ma Lithium-ion Internal Backup
Access Controlled Entry Points	1 – 32 Doors Readers and/or Keypads