

ENCLOSURE SPECIFICATIONS

DSX CONTROLLER ENCLOSURES

Custom Built using design criteria from Installers and Service Technicians

Built for Commercial Installation with Wire Channels and Conduit Knockouts

Conduit Knockouts located at the top, bottom, back and both sides of the Enclosure. Allow for easy connection of stacked or adjacent enclosures.


Wire Channels prevent wire entanglements, confusion and traveling from one Enclosure to another.

Built in Wire Tie Anchors allow the installer to use the supplied wire ties to dress out the panel's field wiring resulting in a neat and serviceable system.


- 18 Ga Steel Cabinets
- Black Powder Coat Finish
- White Silkscreen Logo
- Furnished with Lock & Key to secure against unauthorized personnel.

Can be ordered separately from the Controllers allowing installation, conduit and wiring to each panel location to be completed before purchase of the Controller.

1040E Enclosure

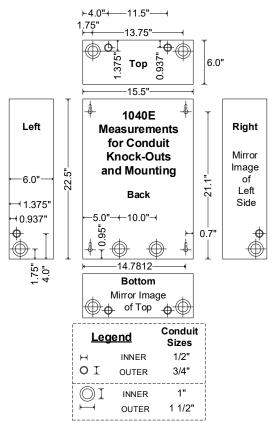

1022E ENCLOSURE

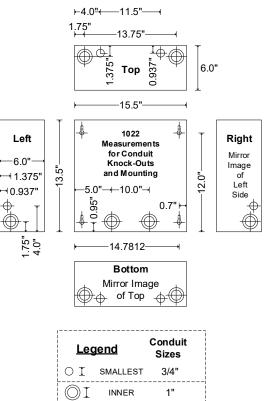


OUTER

k→

1 1/2"

1040 PE / PEB Enclosure

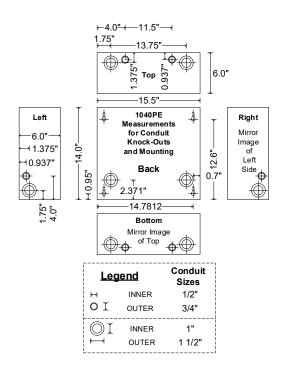

DSX ACCESS SYSTEMS, INC.