




**DSX Access Systems, Inc.**

## **DSX-1044 Intelligent Input Controller**

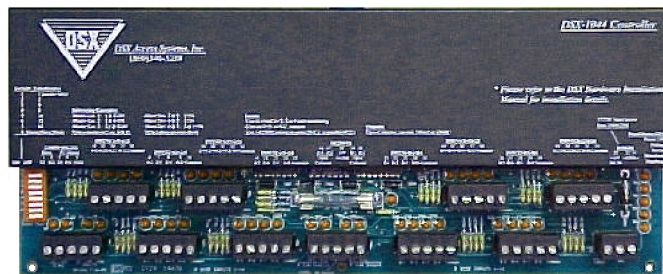

- **32 Programmable Inputs**
- **2, 3, and 4 State Monitoring**
- **4 Digital (open collector) Outputs**
- **LED Status for each Input**
- **UL294 / UL1076**
- **Flexible I/O Linking**
- **Point Monitoring Applications**
- **512K RAM / 512K Flash ROM**

## **DSX-1044 Input Controller**

### **Size**

DSX-1044 11" W x 4.5" H x 1.5" D

### **Weight**

DSX-1044 1.2 lb.

### **Finish**

Black Powder Coat with White Silkscreen on Enclosure and Black Enamel on DSX-1044.

### **Temperature**

Operating 32 to 131 F  
Storage -35 to 150 F

### **Humidity**

Operating 0 to 95%, relative

### **Power Requirements**

DSX-1044 13.5 VDC @ 550ma from 1040CDM

### **Inputs**

Supervised 32  
2, 3, 4 State Monitoring

**UL Installations require a Tamper Switch to be connected to an Input programmed with a 24hr Time Zone.**

### **Outputs**

Digital (open collector) 4  
Output Ratings 12VDC @ 100ma sinking

### **Communication Ports**

RS-232 In 1 Master to PC  
RS-232 Out 1 Panel to DSX-1040CDM

### **Processor**

AM186 20Mhz

### **RAM/ROM Memory**

Flash ROM 512K  
Standard RAM 512K

### **Warranty**

Limited 2 Years