




DSX-1043

INTELLIGENT OUTPUT CONTROLLER

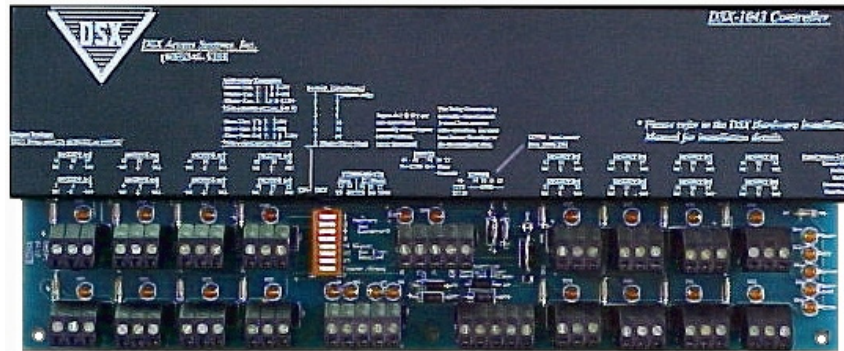

FEATURES

- 16 Programmable Form C Relays
- 4 Time/Day Schedules per Output
- Output Control (Override) Input
- 2 Inputs for point Monitoring
- UL 294 / UL 1076
- Flexible I/O Linking
- Elevator Control
- 512K RAM / 512K Flash ROM

DSX-1043 SPECIFICATIONS

Power Requirements

DSX-1043 13.5 VDC @ 800ma from 1040CDM

Inputs

Non-Supervised 2

2 Inputs are used for standard point monitoring.

Relay Override Input 1

UL Installations require a Tamper Switch to be connected to an Input programmed with a 24hr Time Zone.

Outputs

Form C Relays 16

Relay Output Ratings 5 AMP 30 VDC

Communication Ports

RS-232 In 1 Master to PC

RS-232 Out 1 Panel to DSX-1040CDM

Processor

AM186 20Mhz

RAM/ROM Memory

Flash ROM 512K

Standard RAM 512K

Warranty

Limited 2 Years

Size

DSX-1043 11" W x 4.5" H x 1.5" D

Weight

DSX-1043 1.6 lb.

Finish

Black Powder Coat with White Silkscreen on Enclosure and Black Enamel on DSX-1043.

Temperature

Operating 32 to 131 F

Storage -35 to 150 F

Humidity

Operating 0 to 95%, relative